



# FLEXLOCK RADIUS DRIP EDGE

ANCHOR BAR @ 6'-0" OR 12'-0" LENGTHS, COVER 6'-0" LENGTHS


**IMPORTANT!!!** MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

**PROVIDING A RADIUS**  
THE RADIUS MAY BE PROVIDED IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS  
 \_\_\_\_\_ ' FEET \_\_\_\_\_ " INCHES  
 OR  
 MINIMUM OF 6'-0" (CALL IF LESS)  
 \* RADIUS PRODUCT NOT REQUIRED IF OVER 100'-0"


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET FOR FURTHER INFORMATION

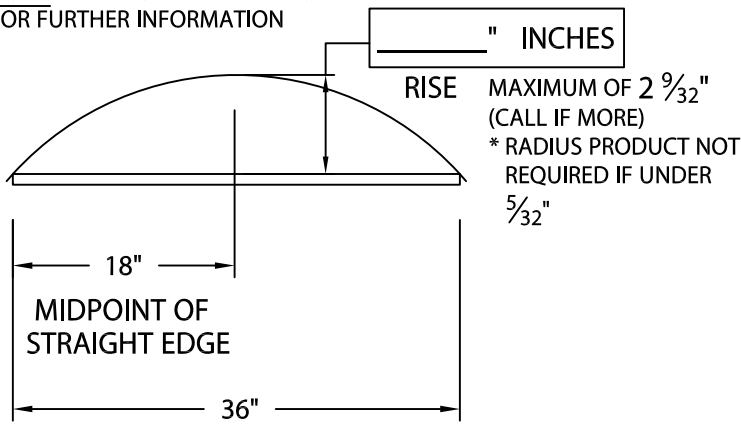

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

**DETAIL A**

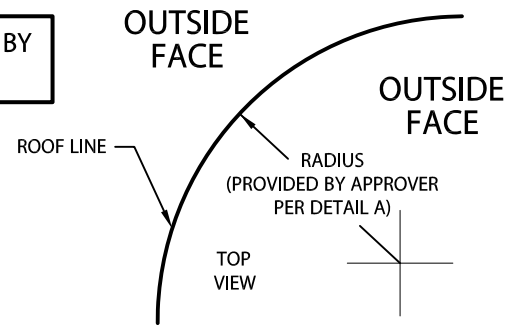

COVER 6'-0" LENGTHS

ANCHOR BAR



RADIUS EXTRUDED BAR, PROVIDED ROLLED IN EITHER 6'-0" OR 12'-0" LENGTHS, DEPENDING ON RADIUS CONDITION

NOTE: PROVIDED WITH 1" LAP NOTCH

FLEXLOCK RADIUS DRIP EDGE DIMENSIONS	
PRODUCT ID. NO.	H DIM
<input type="checkbox"/> AFDE-30	3"
<input type="checkbox"/> AFDE-45	4 1/2"
<input type="checkbox"/> AFDE-60	6"
<input type="checkbox"/> AFDE-75	7 1/2"

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Flex's printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

### MATERIAL:

\_\_\_\_\_ 24 GA. GALVANIZED STEEL

\_\_\_\_\_ .040" ALUMINUM

\_\_\_\_\_ OTHER \_\_\_\_\_

COLOR: \_\_\_\_\_

FINISH: \_\_\_\_\_

### QUANTITIES:

\_\_\_\_\_ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

**Customer Service:**

**Phone: 800-969-0108**

**Fax: 610-916-9501**



DATE: 09/16/24

SHT.# \_\_\_ OF \_\_\_

DRN BY: MLM

CKD BY: MM

DWG# 28010-43827

**A**