




VERSITRIM 2000 STANDARD FASCIA

STONE BALLAST SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 290 psf

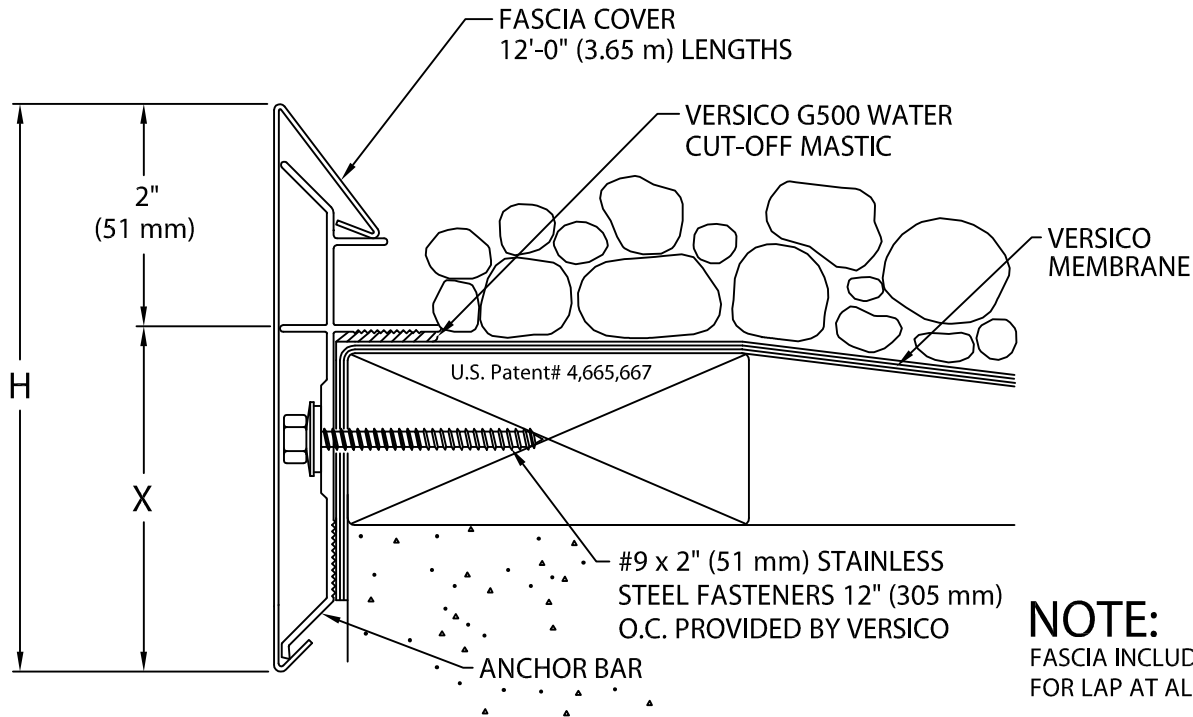

NOTE:

FASCIA INCLUDES 1" (25 mm) NOTCH
FOR LAP AT ALL JOINTS.

Fascia is to be installed per Specifications and Versico's Installation Instructions Dwg. # 18110-1310

VERSITRIM 2000 STANDARD FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> VB*2050	5" (127 mm)	3" (76 mm)	1 NAILER
<input type="checkbox"/> VB*2065	6 1/2" (165 mm)	4 1/2" (114 mm)	2 NAILERS
<input type="checkbox"/> VB*2080	8" (191 mm)	6" (152 mm)	3 NAILERS

Fabrication will proceed only after receipt of
signed print approval.

Print Approval:

Architect and/or contractor shall verify all
dimensions, sizes and quantities. All products
to be installed in strict accordance with
with Versico, Inc's. printed instructions.

Approved by: _____

Date: _____

MATERIAL:

____ 24 Ga. (.65 mm) Galv. Steel

____ .040" (1.01 mm) Aluminum

____ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

____ Lineal Feet 12'-0" (3.65 m) Lengths

____ Outside Miters @ (____)°

____ Inside Miters @ (____)°

____ Overflow Scupper Style ____ A ____ B

____ Spillout Scupper Style ____ A ____ B

____ Downspout Scupper Style ____ A ____ B

(____ X ____) Size A: Tapered 1 1/2" (38 mm) Drop
B: Flat

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
800-558-2162
(Metal-Era)

VERSICO
INCORPORATED



DATE: 11/13/08

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 18010-1579

D